


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 21/06/05		

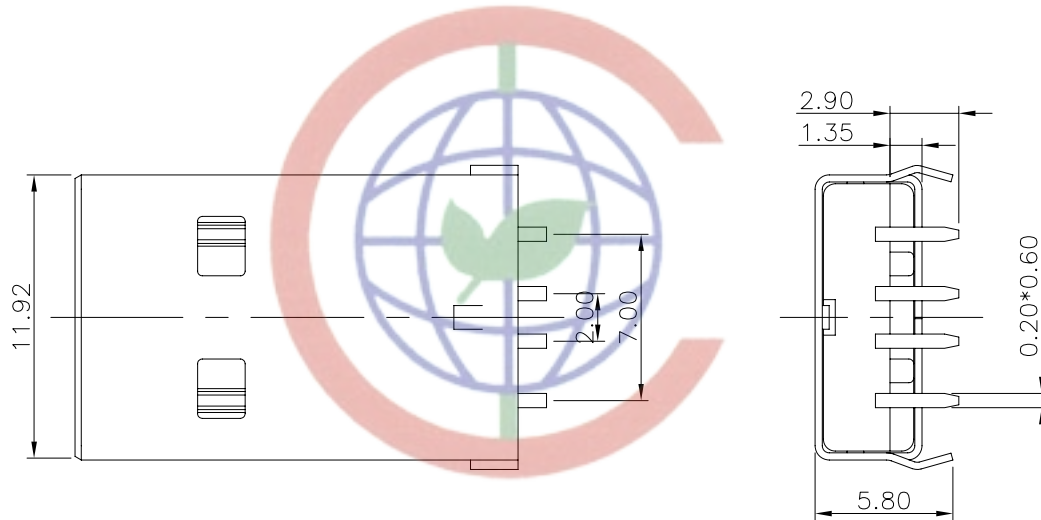

NOTES:



- SPECIFICATIONS:
 - CONTACT RESISTANCE: 30mΩ max.
 - INSULATION RESISTANCE: 1000MΩ min.
 - CURRENT RATING: 1.5A.
 - VOLTAGE RATING: 30VDC.
 - DIELECTRIC WITHSTANDING VOLTAGE: AC 500V FOR 1 Minute.

- MATERIALS:
 - HOUSING: THERMOPLASTIC (UL 94 V-0).
 - CONTACT: COPPER ALLOY
 - SHELL: STEEL

3. PRODUCT NUMBER CODE:

DS1097 - X X X


- CONTACT PLATING
 - 0: Selective Gold Flash
 - 03: Selective Gold 3u"
 - 30: Selective Gold 30u"
- SHELL PLATING
 - N: Nickel
 - 6: Tin
- COLOR OF HOUSING:
 - W: WHITE
 - B: BLACK
- SERIES No. DS1097 series

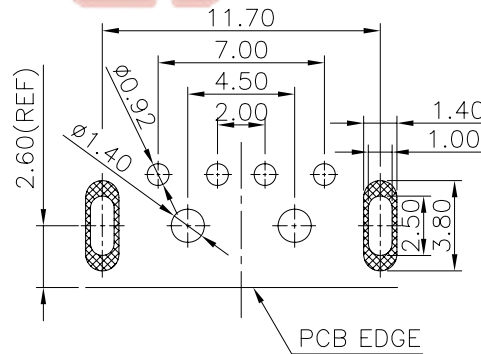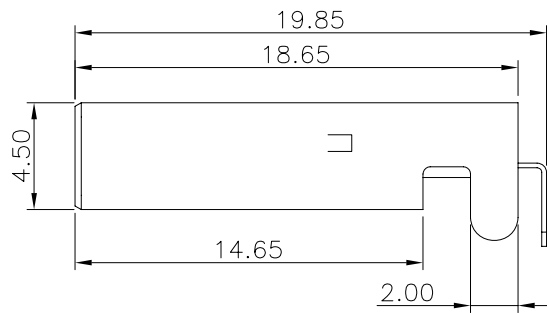

RECOMMEND PCB LAYOUT (TOLERANCE ±0.05)

Tel: 86-574-63508787

Fax: 86-574-63510817

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	⊕	TITLE	USB A TYPE, MALE RIGHT ANGLE TYPE	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1097	
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE	CUSTOMER							
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.	C-DS1097-XXX			Add.: West Jiaochow Rd, Cixi Ningbo, China P.C.: 315321				