

## Features

- ★ Low cost
- ★ With built in capacitor
- ★ High frequency range

## Applications


- ★ Microprocessor system
- ★ Pager
- ★ Remote controller
- ★ Cassette recorder
- ★ Telephone
- ★ Communication equipment
- ★ TV
- ★ VCD player




## Specifications (Characteristics)

Item	Specifications
Frequency Range	ZTTCSMT : 6.00MHz~13.00MHz ZTTCCVMT : 8.00MHz~13.00MHz
Frequency Accuracy	± 0.5%
Temperature Stability at -20°C ~ +80°C	± 0.3%
Internal Capacitance	CS : C1, C2 : 30pF CV : C1, C2 : 22pF
Aging for 10 years	± 0.3%
Applicable IC	1/6 TC 4069 UBP x 2
Package	1000pcs / reel


### ZTTCS MT

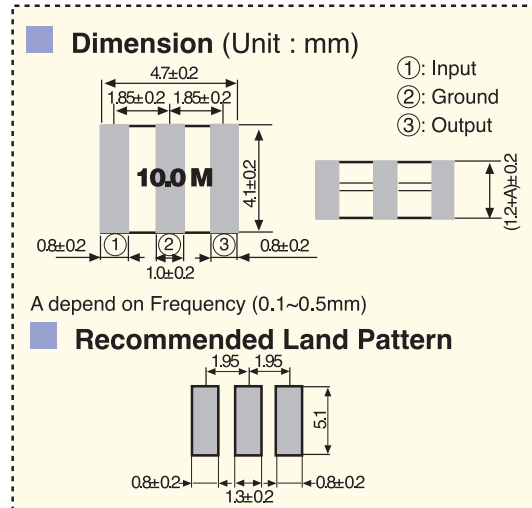


### ZTTCV MT

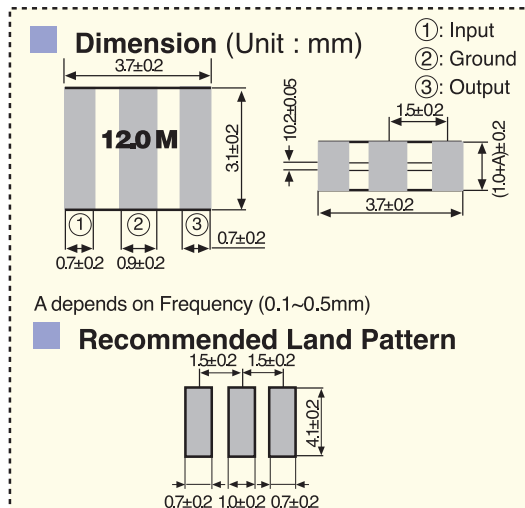

## Test Circuit

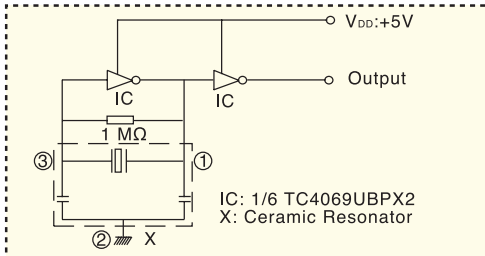

## Recommended Reflow Soldering

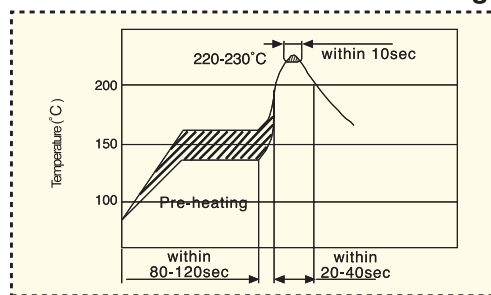

## Ordering Code

Part Number Code	Holder Type + Frequency + Design Mode
Ordering Code	Same as Above
Example	ZTTCS8.18MT or ZTTCCV9.6MT