
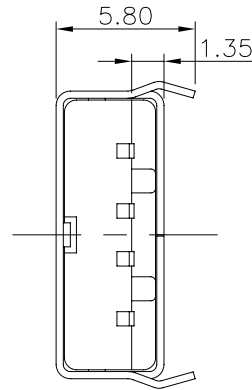


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/09/05'		

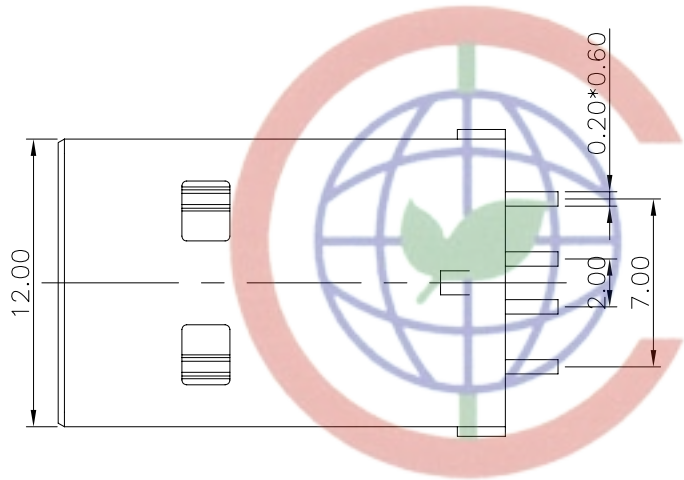

NOTES:

1. SPECIFICATIONS:

- 1.0 CONTACT RESISTANCE:30mΩ max.
- 1.1 INSULATION RESISTANCE:1000MΩ min.
- 1.2 CURRENT RATING:1.5A.
- 1.3 VOLTAGE RATING:30VDC.
- 1.4 DIELECTRIC WITHSTANDING VOLTAGE:AC 500V FOR 1 Minute.

2. MATERIALS:

- 2.0 HOUSING: THERMOPLASTIC (UL 94 V-0).
- 2.1 CONTACT:COPPER ALLOY
- 2.2 SHELL:STEEL

3. PRODUCT NUMBER CODE:

DS1098 - X X X



CONTACT PLATING
 0: Selective Gold Flash
 03: Selective Gold 3u"
 30: Selective Gold 30u"

SHELL PLATING
 N: Nickel
 6: Tin

COLOR OF HOUSING:
 W: WHITE
 B: BLACK

SERIES No.
 DS1098 series

CONNFLY

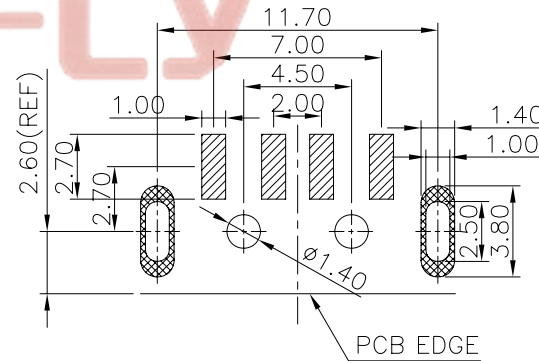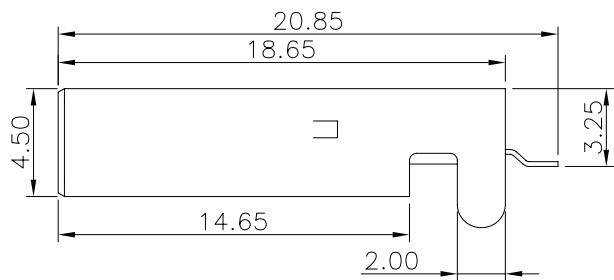

RECOMMEND PCB LAYOUT(TOLERANCE±0.05)

Tel: 86-574-63508787

Fax: 86-574-63510817

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.60	X. ±5°	UNITS	mm
.X ±0.38	.X ±3°	SHEET SIZE	A4
.XX ±0.25	.XX ±2°	SERIES	DS1098
DRAWING TYPE	CUSTOMER	USB A TYPE MALE, SMT R/A TYPE	
SCALE	1:1	SHEET 1 OF 1	
DRAWING NO.	C-DS1098-XXX		

CONNFLY 晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD